

BEDELCO


TYRES



BEDELCO is active in the tyre business since more than 15 years and has developed its own brand LEVEL™ TYRE in 2006. Our technical knowledge and logistical capacities allow us to deliver tyres all over the world, providing the right tyre for the job for professionals and/or endusers.

- TYRE RANGE :**
- **OTR tyres** : from '24 to "63, for loaders, dumpers, graders, cranes,...
Main brand proposed : Hilo, Belshina, Leveltyre, Triangle...
 - **Truck tyres** : Annaite, Double Star, Belshina, Triangle...
 - **Agricultural tyres** : Belshina, Dneproshina,...
 - **Retread truck tyres** (in Romania only)

LOCATION : Headquarter : BEDELCO SPRL, Belgium
Subsidiaries : BEDELCO AL DJAZAÏR, Algeria – BEDELCO EAST EUROPE, Romania
Offices : purchasing office in China, Representative Office in Belarus

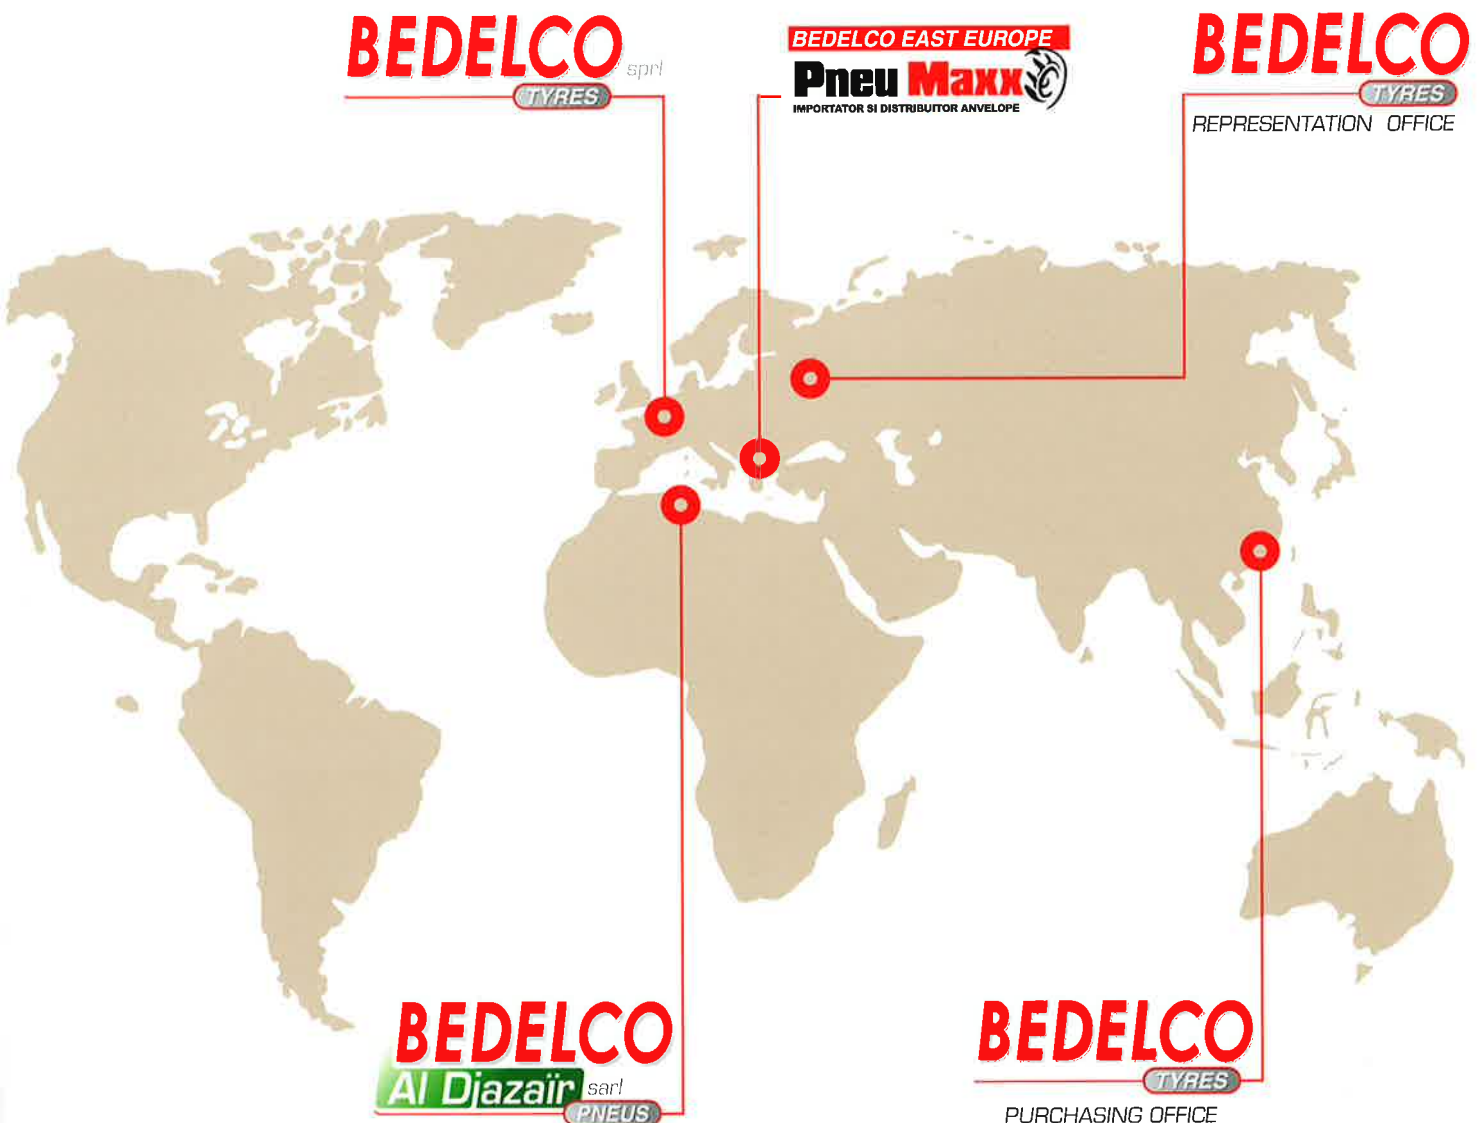

**B01N**17.5R25
20.5R25
23.5R25
26.5R25**B02N**23.5R25
26.5R25
29.5R25
29.5R29**B02S**600/65R25 850/65R25
650/65R25 875/65R29
750/65R25**B03S**

18.00R25

**B04S**18.00R33
21.00R35
24.00R35**B05N**14.00R24 (385/95R24)
14.00R25 (385/95R25)
16.00R25 (445/95R25)
17.5R25 (445/80R25)
20.5R25 (525/80R25)**B06S**18.00R25
18.00R33
21.00R33**BDRS**18.00R33
21.00R35
24.00R35**BDTS**26.5R25
29.5R25**Bel-102**

33.00R51

**Bel-112**

21.00R35

**Bel-122**

24.00R35

**Bel-132**

27.00R49

**Bel-153**

30.00-51

**Bel-156**

33.00-51

**Bel-160**

46/90-57

**Bel-162**

33.00R51

**Bel-170**

46/90-57

**Bel-172**

24.00-35

**Bel-174**

24.00-49

**Bel-180**

36/90-51

**Bel-182**

31/90-49

**Bel-202**

24.00R35

**Bel-51A**

21.00-35

**Bel-95**

16.00R20

BEDELCO

TYRES

Size	Brand	Type	Star/Ply rating	Pattern	TRA Code	Standard Rim (mm)	Section Width (mm)	Overall Diameter	Max Load (Kgs)	Standard Pressure (Kpa)	Max speed (km/h)	Tread Depth (mm)	Remarks
14.00-24	TRIANGLE	Diagonal	12	TL508	E-2	8.0TG	360	1350	3075	250	40	25	TL
	TRIANGLE	Diagonal	16,24	TL612	E-3	10.00	375	1370	10000/5600	925/650	10/50	30	TT
14.00R24	HILO	Radial	★★★	B05N	E2	10.00W	382	1356	6000	800	70	23	TL
	HILO	Radial	★★★	BGZN	E2	10.00W	382	1356	6000	800	70	23	TL
	TRIANGLE	Radial	★★★	TB516S	E4	10.00W	375	1418	5800	700	50	36	TL
	TRIANGLE	Radial	★★★	TB536	E-2	10.00W	375	1368	5800	700	50	25	TL
14.00R25	HILO	Radial	★★★	B05N	E2	10.00/1.5	382	1356	6000	800	70	23	TL
	HILO	Radial	★★★	BGZN	E2	10.00/1.5	382	1356	6000	800	70	23	TL
	TRIANGLE	Radial	★★★	TB516S	E4	10.00/1.5	375	1418	6150	800	50	36	TL
	TRIANGLE	Radial	★★★	TB586	E2	10.00/1.5	375	1368	6000	900	70	22	TL
15.5-25	TRIANGLE	Diagonal	12	TL508	E-2	12.00/1.3	395	1275	5600/3250	400/250	50	25	TL
16.00-25	TRIANGLE	Diagonal	28	TL612	E-3	11.25/2.0	430	1495	11500-6700	750/575	10/50	30	TT/TL
16.00R25	HILO	Radial	★★★	B05N	E2	11.25/2.0	432	1493	7300	700	70	28	TL
	HILO	Radial	★★★	BGZN	E2	11.25/2.0	432	1493	7300	700	70	28	TL
	HILO	Radial	★★★	BWYN	E2	14.00/1.5	432	1493	6000	800	70	28	TL
	HILO	Radial	★★★	M08S	IND4	11.25/2.0	432	1522	14000	1000	25	72.5	TL
	TRIANGLE	Radial	★★★	TB586	E-2	11.25/2.0	432	1493	7300	900	70	24	TL
	TRIANGLE	Radial	★★★	TL558S	E-4	11.25/2.0	432	1548	13250	900	10	51	TL
	TRIANGLE	Radial	★★★	TSMS	L-4S	11.25/2.0	432	1548	13250	900	10	51	TL
16.00R20	BELSHINA	Radial	★★	Bel-95	Off-road	11.25-20	438	1343	6250/6000	760	80/90	25	TL/TT
17.5-25	TRIANGLE	Diagonal	12,16	TL508	E-2	14.00/1.5	445	1350	7300/4250	475/300	10/50	25	TL
	TRIANGLE	Diagonal	12,16	TL612	L-3	14.00/1.5	445	1350	7300/4250	475/300	10/50	26	TT
17.5R25	HILO	Radial	★★	B01N	E3/L3	14.00/1.5	445	1348	8500/5450	575/450	10/50	28	TL
	HILO	Radial	★★★	B05N	E2	14.00/1.5	445	1348	6000	700	70	28	TL
	HILO	Radial	★★	BXDN	E3/L3	14.00/1.5	445	1348	8500/5450	575/450	10/50	182/167	TL
	TRIANGLE	Radial	★★	TB515	L-2	14.00/1.5	445	1348	3350	275	40	27	TL
	TRIANGLE	Radial	★★	TB516	E3/L3	14.00/1.5	445	1348	8500	650	10	26	TL
18.00-25	BELSHINA	Diagonal	32/36	VF-76BM	E3	13.00-25/2.5	498	1615	8750	600	50	37	TL/TT
	TRIANGLE	Diagonal	40	L-5S	L-5S	13.00/2.5	500	1675	17000	950	10	78,5	TL
	TRIANGLE	Diagonal	40	TL510	E-4	13.00/2.5	500	1675	17000/9750	950/700	10/50	54	TL
	TRIANGLE	Diagonal	32	TL612	E-3	13.00/2.5	500	1615	17000/9750	950/700	10/50	30	TT/TL
18.00R25	HILO	Radial	★★	B03S	E4	13.00/2.5	498	1673	9250	700	50	47	TL
	HILO	Radial	★★	B06S	E4P	13.00/2.5	498	1673	9250	700	50	47	TL
	HILO	Radial	★★★	M07S	IND4	13.00/2.5	498	1673	17500	1000	25	63	TL
	HILO	Radial	★★★	M08S	IND4	13.00/2.5	498	1673	17500	1000	25	63	TL
	TRIANGLE	Radial	★★	TB516S	E4	13.00/2.5	498	1673	9250	700	10/50	45	TL
	TRIANGLE	Radial	★★★	TL558S	E-4	13.00/2.5	498	1673	17100	900	10	54	TL
	TRIANGLE	Radial	★★★	TB589	E2	13.00/2.5	498	1617	9500	900	70	26	TL
	TRIANGLE	Radial	★★	TSMS+	L-5S	13.00/2.5	498	1673	17100	900	10	80	TL
18.00R33	HILO	Radial	★★	B04S	E4T	13.00/2.5	498	1877	10900	700	50	54	TL
	HILO	Radial	★★	B06S	E4P	13.00/2.5	498	1877	10900	700	50	49	TL
	HILO	Radial	★★	BDRS	E4R	13.00/2.5	498	1877	10900	700	50	54	TL
	HILO	Radial	★★★	M08S	IND4	13.00/2.5	498	1877	21200	1000	25	73	TL
	TRIANGLE	Radial	★★	TB526S	E4	13.00/2.5	498	1877	18500/10900	825/700	10/50	51	TL

BEDELCO

TYRES

Size	Brand	Type	Star/Ply rating	Pattern	TRA Code	Standard Rim (mm)	Section Width (mm)	Overall Diameter	Max Load (Kgs)	Standard Pressure (Kpa)	Max speed (km/h)	Tread Depth (mm)	Remarks
18.00-33	TRIANGLE	Diagonal	32	TL510	E-4	13.00/2.5	500	1820	17500/10300	750/575	10/50	55	TL
20.5-25	TRIANGLE	Diagonal	12,16	TL508	E-2	17.00/2.0	520	1490	10300/600	525/325	10/40	28,5	TL
	TRIANGLE	Diagonal	16,20	TL612	L-3	17.00/2.0	520	1490	10300/6000	525/325	10/50	28,5	TL
20.5R25	HILO	Radial	★★	B01N	E3/L3	17.00/2.0	520	1492	11500/7300	575/450	10/50	31	TL
	HILO	Radial	★★★	B05N	E2	17.00/2.0	520	1492	7300	700	70	31	TL
	HILO	Radial	★★	BXDN	E3/L3	17.00/2.0	520	1492	11500/7300	575/450	10/50	193/177	TL
	HILO	Radial	★★	BWYN	L2/E2	17.00/2.0	520	1492	11500/4625	650	10/40	31	TL
	HILO	Radial	★★	MWS+	L5	17.00/2.0	521	1548	11500	650	10	78	TL
	HILO	Radial	★★	LCHS+	L5	17.00/2.0	521	1548	11500	650	10	72	TL
	HILO	Radial	★★	SMS+	L5	17.00/2.0	521	1548	11500	650	10	72	TL
	TRIANGLE	Radial	★★	TB515	L-2	17.00/2.0	521	1493	4375	275	40	30	TL
	TRIANGLE	Radial	★★	TB516	E3/L3	17.00/2.0	521	1493	11500/7300	650/525	10/50	30	TL
	TRIANGLE	Radial	★★	TL538S+	L-5	17.00/2.0	521	1548	11500	650	10	70	TL
21.00-25	TRIANGLE	Diagonal	16	TR139	E-7	15.00/3.0	570	1685	3250	70	50	14	TL
21.00-33	BELSHINA	Diagonal	32	VF-166AM	E3	15.00-35/3.0	571	1940	12000	560	50	37	TL/TT
21.00R33	HILO	Radial	★★	B06S	E4	15.00/3.0	572	2001	14000	700	50	54	TL
	TRIANGLE	Radial	★★	TB526S	E4	15.00/3.0	571	2001	23600/14000	825/700	10/50	52	TL
21.00-35	BELSHINA	Diagonal	36	Bel-51A	E3	15.00-35/3.0	588	2004	13250	571	50	55	TL
	TRIANGLE	Diagonal	36	TL558	E3	15.00/3.0	570	2005	23000/12850	750/550	10/50	45	TL
21.00R35	HILO	Radial	★★	B04S	E4	15.00/3.0	572	2046	14500	700	50	54	TL
	HILO	Radial	★★	BDRS	E4R	15.00/3.0	572	2046	14500	700	50	54	TL
	BELSHINA	Radial	★★	Bel-112	E4	15.00-35/3.0	590	2035	15000	700	50	59	TL
	TRIANGLE	Radial	★★	TB526S	E4	15.00/3.0	572	2052	24300/14500	825/700	10/50	60	TL
23.1-26	TRIANGLE	Diagonal	10,12,14	TB812	R-3	DW20	587	1581	3450	180	40	28	TL
23.5-25	TRIANGLE	Diagonal	16	TL508	E-2	19.5/2.5	595	1615	12150/7750	450/325	10/50	30.5	TL
	TRIANGLE	Diagonal	16,18,20	TL612	L-3	19.5/2.5	595	1615	12150/7750	450/325	10/50	32	TL/TT
23.5R25	HILO	Radial	★★	B01N	E3/L3	19.50/2.5	597	1617	14500/9250	650/525	10/50	34	TL
	HILO	Radial	★★	B02N	E3/L3	19.50/2.5	597	1617	14500/9250	650/525	10/50	34	TL
	HILO	Radial	★★	BDS	E4	19.50/2.5	597	1673	9250	525	50	48	TL
	HILO	Radial	★★	BXDN	E3/L3	19.50/2.5	597	1617	14500/9250	650/525	10/50	34	TL
	HILO	Radial	★★	LCHS	L4	19.50/2.5	597	1673	14500	650	10	47	TL
	HILO	Radial	★★	MWS	L4	19.50/2.5	597	1673	14500	650	10	51	TL
	HILO	Radial	★★	MWS+	L5	19.50/2.5	597	1667	14500	650	10	87/51	TL
	HILO	Radial	★★	SMS+	L5	19.50/2.5	597	1673	14500	650	10	78	TL
	HILO	Radial	★★	BWYN	L2/E2	19.50/2.5	597	1617	14500/6000	650	10/40	34	TL
	HILO	Radial	★★	LCHS+	L5	19.50/2.5	597	1673	14500	650	10	78	TL
	TRIANGLE	Radial	★★	TB516	E3/L3	19.50/2.5	597	1617	14500/9250	650/525	10/50	32	TL
	TRIANGLE	Radial	★★	TB598S	E-4	19.50/2.5	597	1673	14500/9250	650/525	10/50	47	TL
	TRIANGLE	Radial	★★	TL528	L3	19.50/2.5	597	1617	14500	650	10	40	TL
	TRIANGLE	Radial	★★	TL538S+	L-5	19.50/2.5	597	1673	14500	650	10	77	TL
	TRIANGLE	Radial	★★	TL559S+	L-5	19.50/2.5	597	1673	14500	650	10	82	TL

Size	Brand	Type	Star/Ply rating	Pattern	TRA Code	Standard Rim (mm)	Section Width (mm)	Overall Diameter	Max Load (Kgs)	Standard Pressure (Kpa)	Max speed (km/h)	Tread Depth (mm)	Remarks
24.00-35	BELSHINA	Diagonal	42	Fbel-150	E4	17.00-35/3.5	653	2175	16500	550	50	58	TL
	BELSHINA	Diagonal	42	Bel-172	E4	17.00-35/3.5	653	2175	16500	550	50	58	TL
	TRIANGLE	Diagonal	42	TL510	E-3	17.00/3.5	655	2125	29000/17000	750/575	10/50	45	TL
24.00R35	HILO	Radial	★★	B04S	E4	17.00/3.5	653	2160	18500	700	50	68	TL
	HILO	Radial	★★	BDRS	E4R	17.00/3.5	653	2160	18500	700	50	54	TL
	LEVEL	Radial	★★	LTR01	E4	17.00/3.5	725	2634	21800	650	50	64	TL
	BELSHINA	Radial	★★	Bel-122	E4	17.00-35/3.0	653	2175	19050	700	50	59	TL
	BELSHINA	Radial	★★	Bel-202	E4	17.00-35/3.5	653	2175	19050	700	50	59	TL
	TRIANGLE	Radial	★★	TB526S	E4	17.00/3.5	653	2175	30750/18500	825/700	10/50	65	TL
24.00-49	BELSHINA	Diagonal	48	Bel-174	E4	17.00-49/3.5	665	2543	21800	650	50	56	TL
26.5-25	TRIANGLE	Diagonal	36	L-5S	L-5S	22.00/3.0	675	1800	18500	625	10	87	TL
	TRIANGLE	Diagonal	20,28	TL612	L3/L4	22.00/3.0	675	1750	18500/10000	625/350	10/50	35	TL
26.5R25	HILO	Radial	★★	B01N	E3/L3	22.00/3.0	673	1750	18500/11500	575/450	10/50	37	TL
	HILO	Radial	★★	B02N	E3/L3	22.00/3.0	673	1750	18500/11500	575/450	10/50	37	TL
	HILO	Radial	★★	BXDN	E3/L3	22.00/3.0	673	1750	18500/11500	575/450	10/50	37	TL
	HILO	Radial	★★	MWS+	L5	22.00/3.0	673	1620	18500	650	10	96/60	TL
	HILO	Radial	★★	SMS+	L5	22.00/3.0	673	1798	18500	650	10	87	TL
	HILO	Radial	★★	BDTS	E4	22.00/3.0	673	1750	11500	525	50	52	TL
	HILO	Radial	★★	BWYN	L2/E2	22.00/3.0	673	1750	18500/11500	650	10/50	37	TL
	HILO	Radial	★★	LCHS+	L5	22.00/3.0	673	1798	18500	650	10	87	TL
	HILO	Radial	★★	LCHS	L4	22.00/3.0	673	1798	18500	500/650	10	57	TL
	HILO	Radial	★★	MWS	L4	22.00/3.0	673	1798	18500	650	10	60	TL
	TRIANGLE	Radial	★★	TB516	E3/L3 2	22.00/3.0	673	1750	18500/11500	650/525	10/50	35	TL
	TRIANGLE	Radial	★★	TB598S	E-4	22.00/3.0	673	1798	18500/11500	650/525	10/50	35	TL
	TRIANGLE	Radial	★★	TL538S+	L-5	22.00/3.0	673	1798	18500	650	10	86	TL
	TRIANGLE	Radial	★★	TL559S+	L-5	22.00/3.0	673	1798	18500	650	10	90	TL
	TRIANGLE	Radial	★★	TSMS+	L-5S	22.00/3.0	673	1798	18500	650	10	94	TL
27.00-49	BELSHINA	Diagonal	48	FT-115	E4	19.50-49/4.0	765	2690	25000	575	50	74	TL
	TRIANGLE	Diagonal	48	TL510	E3	19.50/4.0	735	2700	43750/25000	775/575	10/50	63	TL
27.00R49	HILO	Radial	★★	HLG01	E4	19.50/4.0	737	2702	2725	700	50	68	TL
	BELSHINA	Radial	★★	Bel-132	Rock E4	19.50-49/4.0	737	2702	27250	700	50	5.5	TL
	TRIANGLE	Radial	★★	TB526S	E4	19.50/4.0	700	2688	27250	700	50	76	TL
27.25-21	TRIANGLE	Diagonal	16	TR139	E-7	19.50/1.5	685	1510	3380	70	50	16	TL
29.5-29	TRIANGLE	Diagonal	22,28	TL612	L-3	25.00/3.5	750	1875	17500/11500	425/325	10/50	43	TL
29.5R25	HILO	Radial	★★	B02N	E3/L3	25.00/3.5	750	1873	22400/14000	575/450	10/50	43,5	TL
	HILO	Radial	★★	BXDN	E3/L3	25.00/3.5	750	1873	22400/14000	575/450	10/50	43,5	TL
	HILO	Radial	★★	MWS+	L5	25.00/3.5	750	1920	22400	650	10	104	TL
	HILO	Radial	★★	SMS+	L5	25.00/3.5	750	1921	22400	650	10	100	TL
	HILO	Radial	★★	BDTS	E4	25.00/3.5	750	1921	14000	525	50	57	TL
	HILO	Radial	★★	BWYN	L2/E2	25.00/3.5	750	1873	22400/14000	525	10/50	43,5	TL
	HILO	Radial	★★	LCHS+	L5	25.00/3.5	750	1921	22400	650	10	95	TL
	TRIANGLE	Radial	★★	TB516	E3/L3	25.00/3.5	749	1874	22400	650	10	38	TL
	TRIANGLE	Radial	★★	TL538S+	L-5	25.00/3.5	749	1921	22400	650	10	94	TL
	TRIANGLE	Radial	★★	TL559S+	L-5	25.00/3.5	749	1921	22400	650	10	100	TL
	TRIANGLE	Radial	★★	TB598S	E4	25.00/3.5	749	1921	14000	525	50	57	TL

Size	Brand	Type	Star/Ply rating	Pattern	TRA Code	Standard Rim (mm)	Section Width (mm)	Overall Diameter	Max Load (Kgs)	Standard Pressure (Kpa)	Max speed (km/h)	Tread Depth (mm)	Remarks
29.5R29	HILO	Radial	★★	B02N	E3/L3	25.00/3.5	750	1975	23600/15000	575/450	10/50	43,5	TL
	HILO	Radial	★★	MWS+	L5	25.00/3.5	750	2023	23600	650	10	104	TL
	HILO	Radial	★★	SMS+	L5	25.00/3.5	750	2023	23600	650	10	100	TL
	HILO	Radial	★★	LCHS+	L5	25.00/3.5	750	2023	23600	650	10	95	TL
	HILO	Radial	★★	LCHS	L4	25.00/3.5	749	2023	22400	500/650	10	60	TL
	TRIANGLE	Radial	★★	TB516	E3/L3	25.00/3.5	749	1975	23600/15000	650/525	10/50	38	TL
30.00-51	BELSHINA	Diagonal	56	Bel-153	E4	22.00-4.5	840	2904	30000	550	50	78	TL
31/90-49	BELSHINA	Diagonal	54	Bel-182	E4	19.50-49/4.0	771	2694	27200	650	50	62	TL
33.00-51	BELSHINA	Diagonal	56/58	Bel-156	E4	24.00-51/5.0	897	3061	35500	575	50	87	TL
	BELSHINA	Diagonal	56/58	FT-116AM2	E4	24.00-51/5.0	955	3045	35500	575	50	89	TL
33.00R51	BELSHINA	Radial	★★	Bel-102	E4	24.00-51/5.0	950	3020	40100	700	50	82	TL
	BELSHINA	Radial	★★	Bel-162	E4	24.00-51/5.0	950	3020	40100	700	50	82	TL
	TRIANGLE	Radial	★★	TL588	E4	24.00/5.0	879	3018	38750	700	50	85	TL
33.25R29	TRIANGLE	Radial	★★	TL568+	E-3	27.00/3.5	845	2090	18500	525	50	44	TL
35/65R33	HILO	Radial	★★	MWS+	L5	28.00/3.5	889	2077	23000	500	10	97	TL
	HILO	Radial	★★	LCHS+	L5	28.00/3.5	889	2077	23000	500	10	97	TL
	HILO	Radial	★★	LCHS	L4	28.00/3.5	889	2077	28000	650	10	62.5	TL
	TRIANGLE	Radial	★★	TL535S+	L5	28.00/3.5	889	2077	28000	650	10	95	TL
36.00R51	HILO	Radial	★★	HLG01	E4	26.00/5.0	988	3233	46250	700	50	88	TL
	TRIANGLE	Radial	★★	TB599	E4	26.00/5.0	1019	3251	46250	700	50	102	TL
36/90-51	BELSHINA	Diagonal	58	Bel-180	E4	24.00-51/5.0	955	3045	36500	575	50	84	TL
37.00R57	TRIANGLE	Radial	★★	TB599	E4	27.00/6.0	1054	3442	51500	700	50	102	TL
385/95R24	TRIANGLE	Radial	***	TB586	E-2	10.00W	375	1368	6000	900	70	22	TT
385/95R25	TRIANGLE	Radial	***	TB586	E2	10.00/1.5	375	1368	6000	900	70	22	TL
40.00-57	BELSHINA	Diagonal	68	FT-117	E4	29.00-57/6.0	1140	3575	54500/50500	550/500	50	96	TL
40/65-39	LEVEL	Diagonal	42	LT58	L5	32.00/4.0	1016	2405	33000	550	10	106	TL
445/95R25	TRIANGLE	Radial	***	TB586	E-2	11.25/2.0	432	1493	7300	900	70	24	TL
45/65-39	LEVEL	Diagonal	58	LT58	L5	36.00/4.5	1180	2740	40000	450	10	116	TL
45/65-45	LEVEL	Diagonal	58	LT58	L5	36.00/4.5	1140	2733	50000	675	10	116	TL
46/90-57	BELSHINA	Diagonal	68	Bel-160	E3	29.00-57/6.0	1150	3575	56500	580	50	76	TL
	BELSHINA	Diagonal	68	Bel-170	E4	29.00-57/6.0	1175	3575	56500/61500	580/615	50/20	76	TL
46/90R57	TRIANGLE	Radial	★★	TB599	E4	32.00/6.0	1187	3569	63000	700	50	102	TL
505/95R25	TRIANGLE	Radial	***	TB589	E2	13.00/2.5	498	1617	9500	900	70	26	TL
600/65R25	HILO	Radial	★★	B02S	E3/L3	19.50/2.5	606	1415	9750	425/475	50/10	35.5	TL

Size	Brand	Type	Star/Ply rating	Pattern	TRA Code	Standard Rim (mm)	Section Width (mm)	Overall Diameter	Max Load (Kgs)	Standard Pressure (Kpa)	Max speed (km/h)	Tread Depth (mm)	Remarks
650/65R25	HILO	Radial	★★	B02S	E3/L3	19.50/2.5	640	1480	11500	475	10	38.5	TL
66X44.00-25	TRIANGLE	Diagonal	6,16,20	TR128	E-7	36.0T	1118	1702	7020	345	50	10	TL
750/65R25	HILO	Radial	★★	B02S	E3/L3	24.00/3.0	754	1610	15000	425/475	50/10	4.5	TL
	TRIANGLE	Radial	★★	TB598	E3	24.00/3.0	754	1611	18500/10600	625/425	10/50	42	TL
775/65R29	TRIANGLE	Radial	★★	TB598	E3	24.00/3.0	771	1745	20600/12850	625/425	10/50	44	TL
850/65R25	HILO	Radial	★★	B02S	E3/L3	27.00/3.5	852	1740	17500	425/475	50/10	48.5	TL
875/65R29	HILO	Radial	★★	B02S	E3/L3	28.00/3.5	883	1881	21200	475	10	52.5	TL
	TRIANGLE	Radial	★★	TB598	E3	28.00/3.5	868	1868	25750/15500	625/425	10/50	50	TL



BGZN

14.00R24 (385/95R24)
14.00R25 (385/95R25)
16.00R25 (445/95R25)



BWYN

16.00R25 | 26.5R25
20.5R25 | 29.5R25
23.5R25



BXDN

17.5R25 | 26.5R25
20.5R25 | 29.5R25
23.5R25



FBel-150

24.00-35



FT115

27.00-49



FT-116AM2

33.00-51



FT117

40.00-57



HLG01

27.00R49
36.00R51



L-5S

18.00-25
26.5-25



LCHS

26.5R25
29.5R29
33/65R33



LCHS+

23.5R25 | 29.5R29
26.5R25 | 35/65R33
29.5R25



LT58

40/65-39
45/65-39
45/65-45



LTR01

24.00R35



M07S

18.00R25



M08S

16.00R25
18.00R25
18.00R33



MWS

23.5R25
26.5R25



MWS+

20.5R25 | 29.5R25
23.5R25 | 29.5R29
26.5R25 | 35/65R33



SMS+

23.5R25
26.5R25
29.5R25
29.5R29



TB515

17.5R25
20.5R25



TB516

17.5R25 | 26.5R25
20.5R25 | 29.5R25
23.5R25 | 29.5R29



TB516S

14.00R24
14.00R25
18.00R25



TB526S

18.00R33 | 24.00R35
21.00R33 | 27.00R49
21.00R35



TB536

14.00R24



TB586

14.00R24 (385/95R24)
14.00R25 (385/95R25)
16.00R25 (445/95R25)
18.00R33 | 24.00R35
21.00R33 | 27.00R49
21.00R35



TB589

18.00R25
505/95R25



TB598

750/65R25
775/65R29
875/65R29

TB598S

23.5R25
26.5R25
29.5R25

TB599

36.00R51
37.00R57
46/90R57

TB812

23.1-26

TL508

14.00-24 | 20.5-25
15.5-25 | 23.5-25
17.5-25



TL510

18.00-25
18.00-33
24.00-35
27.00-49

TL528

23.5R25

TL535S+

35/65R33

TL538S+

20.5R25
23.5R25
26.5R25
29.5R25

TL558

21.00-35



TL558S

16.00R25
18.00R25

TL559S+

23.5R25
26.5R29
29.5R25

TL568+

33/25R29

TL588

33.00R51

TL612

14.00-24 | 20.5-25
16.00-25 | 23.5-25
17.5-25 | 26.5-25
18.00-25 | 29.5-29



TR128

66X44.00-25

TR139

21.00-25
27.25-21

TSMS

16.00R25

TSMS+

18.00R25
26.00R25

VF-76BM

18.00-25



VF-166AM

21.00-33

LOAD AND SPEED INDEX

LOAD INDEX	Index	kg	Index	kg	Index	kg	Index	kg	Index	kg	Index	kg
	0	45	34	118	68	315	102	850	136	2240	170	6000
	1	46,2	35	121	69	325	103	875	137	2300	171	6150
	2	47,5	36	125	70	335	104	900	138	2360	172	6300
	3	48,7	37	128	71	345	105	925	139	2430	173	6500
	4	50	38	132	72	355	106	950	140	2500	174	6700
	5	51,5	39	136	73	365	107	975	141	2575	175	6900
	6	53	40	140	74	375	108	1000	142	2650	176	7100
	7	54,5	41	145	75	387	109	1030	143	2725	177	7300
	8	56	42	150	76	400	110	1060	144	2800	178	7500
	9	58	43	155	77	412	111	1090	145	2900	179	7750
	10	60	44	160	78	425	112	1120	146	3000	180	8000
	11	61,5	45	165	79	437	113	1150	147	3075	181	8250
	12	63	46	170	80	450	114	1180	148	3150	182	8500
	13	65	47	175	81	462	115	1215	149	3250	183	8750
	14	67	48	180	82	475	116	1250	150	3350	184	9000
	15	69	49	185	83	487	117	1285	151	3450	185	9250
	16	71	50	190	84	500	118	1320	152	3550	186	9500
	17	73	51	19	85	515	119	1360	153	3650	187	9750
	18	75	52	200	86	530	120	1400	154	3750	188	10000
	19	77,5	53	206	87	545	121	1450	155	3875	189	10300
	20	80	54	212	88	560	122	1500	156	4000	190	10600
	21	82,5	55	218	89	580	123	1550	157	4125	191	10900
	22	85	56	224	90	600	124	1600	158	4250	192	11200
	23	87,5	57	230	91	615	125	1650	159	4375	193	11500
	24	90	58	236	92	630	126	1700	160	4500	194	11800
	25	92,5	59	243	93	650	127	1750	161	4625	195	12150
	26	95	60	250	94	670	128	1800	162	4750	196	12500
	27	97	61	257	95	690	129	1850	163	4875	197	12850
	28	100	62	265	96	710	130	1900	164	5000	198	13200
	29	103	63	272	97	730	131	1950	165	5150	199	13600
	30	106	64	280	98	750	132	2000	166	5300	200	14000
	31	109	65	290	99	775	133	2060	167	5450	201	14500
	32	112	66	300	100	800	134	2120	168	5600	202	15000
	33	115	67	307	101	825	135	2180	169	5800	203	15500

SPEED INDEX

Index	A1	A2	A3	A4	A5	A6	A8	B	C	D	E	F	G	J
Km/h	5	10	15	20	25	30	40	50	60	65	70	80	90	100
Index	K	L	M	N	P	Q	R	S	T	U	H	V	W	Z
Km/h	110	120	130	140	150	160	170	180	190	200	210	240	270	+270

BEDELCO

TYRES

Rue de l'Environnement 22
B-4100 Seraing - BELGIUM
Phone : +32 4 330 18 60
Fax : +32 4 330 18 66
Email : info@bedelco.com
Web : www.bedelco.com

BEDELCO

Al Djazair part
@PNEUS

Lotissement ATTAR, Groupe C N° 20
Dar El Beida - ALGER
Phone : +213 21 75 22 31
Fax : +213 21 75 22 31
Email : info@bedelco.dz
Web : www.bedelco.dz

BEDELCO EAST EUROPE

Pneu Maxx

IMPORTATOR SI DISTRIBUTOR ANVELOPE

Aleea Maria-Laura, Com Dragomiresti Vale
077040 - ROMANIA
Phone : +40 21 202 60 60
Fax : +40 21 202 60 10
E-mail : office.tyres@pneumaxx.ro
Web : www.pneumaxx.ro

