

BEDELCO

TYRES



 **BELSHINA**


 **QINGDAO DOUBLESTAR TIRE**

 **TRIANGLE**

BEDELCO is active in the tyre business since more than 15 years and has developed its own brand LEVEL™ TYRE in 2006. Our technical knowledge and logistical capacities allow us to deliver tyres all over the world, providing the right tyre for the job for professionals and/or endusers.

- TYRE RANGE :**
- **OTR tyres** : from '24 to '63, for loaders, dumpers, graders, cranes,...
Main brand proposed : Hilo, Belshina, Leveltyre, Triangle...
 - **Truck tyres** : Annaite, Double Star, Belshina, Triangle...
 - **Agricultural tyres** : Belshina, Dneproshina,...
 - **Retread truck tyres** (in Romania only)

LOCATION : Headquarter : BEDELCO SPRL, Belgium
Subsidiaries : BEDELCO AL DJAZAÏR, Algeria – BEDELCO EAST EUROPE, Romania
Offices : purchasing office in China, Representative Office in Belarus

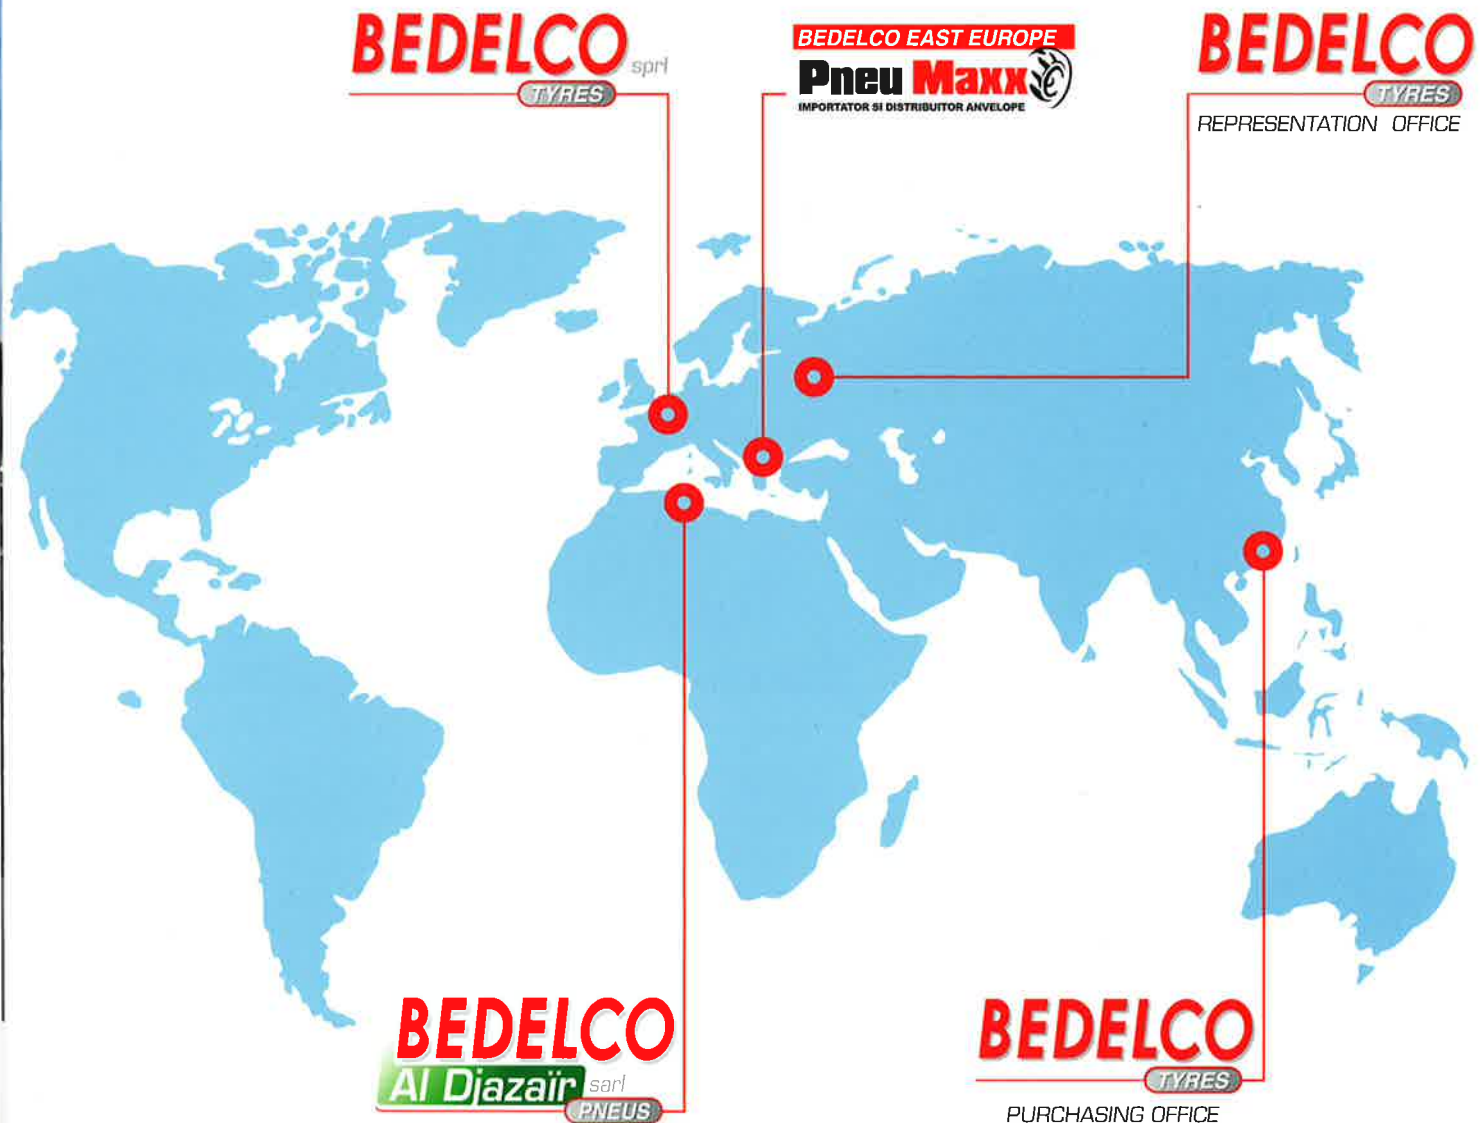



TR619
10R22.5



TR656
255/70R22.5 | 8.5R17.5
275/70R22.5 | 8R19.5
9.5R17.5



TR657
10R22.5
11R22.5
13R22.5
295/75R22.5



TR660
8R22.5



TR665
315/80R22.5
9R22.5



TR666
11R22.5
12R22.5
275/80R22.5
315/80R22.5



TR668
11R22.5
12R22.5
13R22.5
315/80R22.5



TR669
13R22.5



TR675
265/70R19.5



TR680
295/60R22.5



TR685
10R22.5 | 235/75R17.5
205/75R17.5 | 245/70R19.5
215/75R17.5 | 315/70R22.5
225/70R19.5



TR686
11R22.5
12R22.5
295/75R22.5
295/80R22.5
315/80R22.5



TR688
11R22.5
12R22.5
295/75R22.5
295/80R22.5
315/80R22.5



TR689A
215/75R17.5
235/75R17.5



TR692
385/65R22.5



TR695
10R22.5
11R22.5
12R22.5
13R22.5



TR697
385/65R22.5



TRD02
295/80R22.5
315/80R22.5



TRD06
295/80R22.5
315/70R22.5
315/80R22.5



TRS02
295/80R22.5
315/80R22.5



NOT AVAILABLE FOR EUROPEAN DISTRIBUTION - PAS DISPONIBLE EN EUROPE

Size	Brand	Patern	Ply rating	Load index single	Load index double	Speed range	Standard Rim	Load capacity single	Load capacity double	Inflation Pressure (kPa)	Section width (mm)	Overall diameter (mm)
1000R20	Belshina	Bel-114	16/18	146/149	143/146	K/J	7.5-20	3000/3250	2725/3000	800/930	275	1052
	Belshina	Bel-25	16/18	146/149	143/146	K/J	7.5-20	3000/3250	2725/3000	800/930	275	1052
	Belshina	Bel-310	16	146	143	K	7.5-20	3300	3000	820	275	1082
	Belshina	I-A185	16	146	143	K	7.5-20	3000	2725	800	275	1052
	Double Star	DSR158	18	149	146	K	7.5	3000	2630	840	278	1054
	Double Star	DSRAAA	18	149	146	K	7.5	3250	3000	930	278	1054
	Double Star	HR168	16	146	143	K	7.5	3000	2630	840/770	278	1054
	Double Star	HR169	16	146	143	K	7.5	3000	2630	840/770	278	1054
10R22.5	Double Star	DSR266	16	144	142	M	7.5	2800	2650	850	254	1019
	TRIANGLE	TR619	14	141	139	M	7.5	2575	2430	790	254	1019
	TRIANGLE	TR657	14	141	139	M	7.5	2575	2430	790	254	1019
	TRIANGLE	TR685	14	141	139	M	7.5	2575	2430	790	254	1019
	TRIANGLE	TR685	16	144	142	L	7.5	2800	2650	900	254	1019
	TRIANGLE	TR695	14	141	139	M	7.5	2575	2430	790	254	1019
	TRIANGLE	TR695	16	144	142	L	7.5	2800	2650	900	254	1019
1100R20	Belshina	Bel-115	16	150	146	K	8.0-20	3350	3000	820	286	1082
	Belshina	Bel-124	16	150	146	K	8.0-20	3350	3000	820	286	1082
	Belshina	Bel-310	16	150	146	K	8.0-20	3350	3000	820	286	1082
	Belshina	BI-247-1,D-3B	16	150	146	K	8.0-20	3350	3000	820	286	1082
	Belshina	I-111AM	16	150	146	K	8.0-20	3350	3000	820	286	1082
	Double Star	DSR158	18	152	149	K	8	3550	3250	930	286	1082
	Double Star	DSR168	18	152	149	K	8	3550	3250	930	286	1082
	Double Star	DSR668	18	152	149	K	8	3550	3250	930	293	1085
Double Star	HR169	18	152	149	K	8	3550	3250	930	286	1082	
11R22.5	Double Star	DSR116	16	146	143	L	8.25	3000	2725	830	279	1054
	Double Star	DSR168	16	146	143	L	8.25	3000	2725	830	279	1054
	Double Star	DSR258	16	146	143	L	8.25	3000	2725	830	279	1054
	Double Star	DSR266	16	148	145	M	8.25	3000	2725	830	279	1054
	Double Star	DSR566	16	146	143	M	8.25	3000	2725	830	279	1054
	Double Star	DSR669	16	146	143	M	8.25	2800	2650	720	279	1054
	Double Star	DSR728	16	146	143	M	8.25	3000	2725	830	279	1054
	Double Star	DSR768	16	146	143	L	8.25	3000	2725	830	279	1054
	Double Star	DSR865	16	146	143	L	8.25	3000	2725	830	279	1054
	Double Star	HR169	16	148	145	M	8.25	3000	2725	830	279	1054
	DoubleStar	HR268	16	148	145	M	8.25	3000	2725	830	279	1054
	TRIANGLE	TR657	16	146	143	M	8.25	3000	2725	830	279	1054
	TRIANGLE	TR666	16	146	143	M	8.25	3000	2725	830	279	1054
	TRIANGLE	TR668	16	146	143	M	8.25	3000	2725	830	279	1054
	TRIANGLE	TR686	16	148	144	M	8.25	3000	2725	830	279	1054
	TRIANGLE	TR688	16	146	143	M	8.25	3000	2725	830	279	1054
	TRIANGLE	TR695	16	146	143	M	8.25	3000	2725	830	279	1054
Double Star	DSR355	16	146	143	M	8.25	3000	2725	830	279	1054	
11R24.5	Double Star	DSR116	16	149	146	M	8.25	3250	3000	830	279	1104
	Double Star	DSR266	16	149	146	M	8.25	3250	3000	830	279	1104
	Double Star	DSR355	16	149	146	M	8.25	3250	3000	830	279	1104
	Double Star	DSR566	16	149	146	M	8.25	3250	3000	830	279	1104
	Double Star	DSR669	16	149	146	M	8.25	3250	3000	830	279	1104
	Double Star	DSR728	16	149	146	M	8.25	3250	3000	830	279	1104
	Double Star	DSR768	16	149	146	M	8.25	3250	3000	830	279	1104



NOT AVAILABLE FOR EUROPEAN DISTRIBUTION - PAS DISPONIBLE EN EUROPE

Size	Brand	Patern	Ply rating	Load index single	Load index double	Speed range	Standard Rim	Load capacity single	Load capacity double	Inflation Pressura (kPa)	Section width (mm)	Overall diameter (mm)
1200R20	Belshina	Bel-110	18	154	150	J	8.5-20	3750	3350	850	313	1122
	Belshina	Bel-116	18	154	149	J	8.5-20	3750	3250	850	313	1122
	Belshina	BI-368M	18	154	149	J	8.5-20	3750	3250	850	313	1122
	Belshina	U-4.ID-304M	16/18	150/154	146/149	J	8.5-20	3350/3750	3000/3250	750/850	313	1122
	Double Star	DSR158	18	154	151	K	8.5	3750	3450	830	315	1125
	Double Star	DSR168	18	154	151	K	8.5	3750	3450	830	315	1125
1200R24	Double Star	DSR168	20	158	155	K	8.5	4500	4125	900	340	1251
	Double Star	DSR188	20	160	157	L	8.5	4500	4125	900	340	1251
12R22.5	Double Star	DSR08	16	150	147	M	9	3350	3075	830	300	1084
	Double Star	DSR08A	18	152	149	M	9	3550	3075	930	300	1084
	Double Star	DSR168	16	150	147	M	9	3350	3075	830	300	1084
	Double Star	DSR266	16	150	147	M	9	3350	3075	830	300	1085
	Double Star	DSR668	16	150	147	M	9	3350	3075	830	300	1084
	Double Star	HR366	16	150	147	M	9	3350	3075	830	300	1084
	TRIANGLE	TR666	16	152	148	L	9	3550	3150	900	300	1085
	TRIANGLE	TR668	16	150	147	L	9	3350	3075	830	300	1085
	TRIANGLE	TR686	16	152	148	L	9	3550	3150	900	300	1085
	TRIANGLE	TR688	16	150	147	L	9	3350	3075	830	300	1085
	TRIANGLE	TR695	16	150	147	L	9	3350	3075	830	300	1085
13R22.5	Double Star	DSR158	18	154	150	K	9.75	3750	3350	850	320	1124
	Double Star	DSR168	18	154	150	K	9.75	3750	3350	850	320	1124
	Double Star	DSR188	18	154	150	K	9.75	3750	3350	850	320	1124
	Double Star	DSR669	18	154	150	L	9.75	3750	3350	850	320	1124
	TRIANGLE	TR657	18	156	150	L	9.75	4000	3650	875	320	1124
	TRIANGLE	TR668	18	153	150	L	9.75	4000	3650	875	320	1124
	TRIANGLE	TR669	18	153	150	K	9.75	4000	3650	875	320	1124
	TRIANGLE	TR695	18	153	150	L	9.75	4000	3650	875	320	1124
205/75R17.5	TRIANGLE	TR685	16	126	124	M	6	1700	1600	810	204	753
215/75R17.5	Double Star	DSR08A	16	126	124	L	6	1700	1600	700	212	767
	Double Star	DSR08A	18	135	133	J	6	2180	2060	850	212	767
	Double Star	DSR116	16	126	124	L	6	1700	1600	700	212	767
	Double Star	DSR116	18	135	133	J	6	2180	2060	850	212	767
	Double Star	DSR165	18	135	133	J	6	2180	2060	850	212	767
	Double Star	DSR165	16	126	124	L	6	1700	1600	700	212	767
	TRIANGLE	TR685	14	126	124	M	6	1700	1600	700	211	767
	TRIANGLE	TR685	16	135	133	L	6	2180	2060	860	211	767
	TRIANGLE	TR689A	16	135	133	L	6	2180	2060	860	211	767
225/70R19.5	Double Star	DSR08A	14	128	126	M	6.75	1800	1700	760	226	811
	TRIANGLE	TR685	14	128	126	L	6.75	1800	1700	760	226	811
225/75R17.5	Double Star	DSR116	16	129	127	L	6.75	1850	1750	725	228	784
	Double Star	DSR266	16	129	127	L	6.75	1850	1750	725	228	784
235/75R17.5	Double Star	DSR116	18	143	141	J	6.75	2725	2575	775	233	797
	Double Star	DSR165	18	143	141	J	6.75	2725	2575	775	233	797
	Double Star	DSR266	18	143	141	J	6.75	2725	2575	775	233	797
	TRIANGLE	TR685	18	143	141	J	6.75	2725	2575	860	233	797
	TRIANGLE	TR689A	16	141	140	J	6.75	2575	2500	850	233	797



NOT AVAILABLE FOR EUROPEAN DISTRIBUTION - PAS DISPONIBLE EN EUROPE

Size	Brand	Patern	Ply rating	Load index		Speed range	Standard Rim	Load capacity		Inflation Pressure (kPa)	Section width (mm)	Overall diameter (mm)
				single	double			single	double			
245/70R19.5	Double Star	DSR116	16	136	134	L	7.5	2240	2120	825	248	839
	Double Star	DSR266	16	136	134	L	7.5	2240	2120	825	248	839
	TRIANGLE	TR685	14	133	131	L	7.5	2060	1950	760	248	839
255/70R22.5	Double Star	DSR355	16	140	137	L	7.5	2500	2300	800	255	930
	Double Star	DSR669	16	140	137	L	7.5	2500	2300	800	255	930
	TRIANGLE	TR656	16	140	137	M	7.5	2500	2300	830	255	930
265/70R19.5	Double Star	DSR116	16	140	138	L	7.5	2500	2360	775	262	867
	Double Star	DSR266	16	140	138	L	7.5	2500	2360	775	262	867
	TRIANGLE	TR675	18	143	141	J	7.5	2725	2575	850	262	867
275/70R22.5	Double Star	DSR116	16	148	145	L	8.25	3150	2900	900	276	960
	Double Star	DSR266	16	148	145	L	8.25	3150	2900	900	276	960
	TRIANGLE	TR656	16	148	145	L	8.25	3150	2900	860	276	958
275/80R22.5	Double Star	DSR266	16	145	143	M	8.25	2900	2725	750	276	1012
	TRIANGLE	TR666	16	149	146	M	8.25	3250	3000	850	276	1012
285/75R24.5	Double Star	DSR266	16	147	144	M	8.25	3075	2800	830	283	1050
	Double Star	DSR355	16	147	144	M	8.25	3075	2800	830	283	1050
	Double Star	DSR566	16	147	144	M	8.25	3075	2800	830	283	1050
	Double Star	DSR669	16	147	144	M	8.25	3075	2800	830	283	1050
295/60R22.5	Double Star	DSR116	16	149	146	L	9	3250	3000	900	292	926
	TRIANGLE	TR680	18	149/150	146/147	L/K	9	3350	3075	900	292	926
295/75R22.5	Double Star	DSR116	16	144	141	L	9	2800	2575	760	298	1014
	Double Star	DSR258	16	146	143	M	9	3000	2725	830	298	1014
	Double Star	DSR266	16	146	143	M	9	3000	2725	830	298	1014
	Double Star	DSR355	16	146	143	M	9	3000	2725	830	298	1014
	Double Star	DSR566	16	146	143	M	9	3000	2725	830	298	1014
	Double Star	DSR669	16	146	143	M	9	3000	2725	830	298	1014
	Double Star	DSR768	16	146	143	M	9	3000	2725	830	298	1014
	TRIANGLE	TR657	14	144	141	M	9	2800	2575	760	298	1014
	TRIANGLE	TR686	14	144	141	M	9	2800	2575	760	298	1014
TRIANGLE	TR688	14	144	141	M	9	2800	2575	760	298	1014	
295/80R22.5	Double Star	DSR08	18	152	148	L	9	3550	3150	850	298	1044
	Double Star	DSR08A	18	154	152	M	9	3550	3150	850	298	1044
	Double Star	DSR266	18	154	152	M	9	3550	3150	850	298	1044
	Double Star	DSR566	18	152	148	L	9	3550	3150	850	298	1044
	Double Star	DSR868	18	154	152	M	9	3550	3150	850	298	1044
	TRIANGLE	TR686	16	152	148	M	9	3550	3150	850	298	1044
	TRIANGLE	TR688	16	152	148	M	9	3550	3150	850	298	1044
	TRIANGLE	TRD02	16	152	148	M	9	3550	3150	850	298	1044
	TRIANGLE	TRD06	16	152	148	L	9	3550	3150	850	298	1044
TRIANGLE	TRS02	16	152	148	M	9	3550	3150	850	298	1044	
315/60R22.5	Double Star	DSR116	16	152	148	L	9.75	3550	3150	900	313	950
	Double Star	DSR165	16	152	148	L	9.75	3550	3150	900	313	950



NOT AVAILABLE FOR EUROPEAN DISTRIBUTION - PAS DISPONIBLE EN EUROPE

Size	Brand	Patern	Ply rating	Load index single	Load index double	Speed range	Standard Rim	Load capacity single	Load capacity double	Inflation Pressure (kPa)	Section width (mm)	Overall diameter (mm)
315/70R22.5	Double Star	DSR08A	18	154	150	L	9	3750	3350	830	312	1014
	Double Star	DSR165	18	154	150	L	9	3750	3350	900	312	1014
	Double Star	DSR266	18	154	150	L	9	3750	3350	900	312	1014
	Double Star	DSR868	18	154	150	L	9	3750	3350	900	312	1014
	TRIANGLE	TR685	16	152	148	M	9	3550	3150	830	312	1014
	TRIANGLE	TRD06	16	154	150	L	9	3550	3150	830	312	1014
315/80R22.5	Double Star	DSR08	18	154	151	M	9	3750	3450	830	312	1076
	Double Star	DSR08A	18	154	151	M	9	3750	3450	830	312	1076
	Double Star	DSR116	18	154	151	M	9	3750	3450	830	312	1076
	Double Star	DSR168	18	156	150	L	9	3750	3450	850	312	1076
	Double Star	DSR188	18	156	150	L	9	3750	3450	830	312	1076
	Double Star	DSR266	18	156	150	L	9	3750	3450	830	312	1076
	Double Star	DSR668	20	156	150	L	9	3750	3350	830	312	1076
	Double Star	DSR669	18	156	150	L	9	3750	3450	830	312	1076
	Double Star	DSR868	18	154	151	M	9	3750	3450	830	312	1076
	Double Star	HR569	18	156	150	L	9	3750	3450	830	312	1076
	TRIANGLE	TR665	18	154	151	M	9	3750	3450	830	312	1076
	TRIANGLE	TR666	18	154	151	M	9	3750	3450	830	312	1076
	TRIANGLE	TR666	20	157	154	L	9	4125	3750	900	312	1076
	TRIANGLE	TR668	18	154	151	M	9	3750	3450	830	312	1076
	TRIANGLE	TR686	18	154	151	M	9	3750	3450	830	312	1076
	TRIANGLE	TR686	20	157	154	L	9	4125	3750	900	312	1076
	TRIANGLE	TR688	18	154	151	M	9	3750	3450	830	312	1076
	TRIANGLE	TRD02	18	154	151	M	9	3750	3450	830	312	1076
TRIANGLE	TRD06	18	154	151	L	9	3750	3450	830	312	1076	
TRIANGLE	TRS02	18	154	151	M	9	3750	3450	830	312	1076	
385/55R22.5	Double Star	DSR118	20	160	/	K	12.25	4500	/	900	386	996
	Double Star	DSR128	20	160	/	K	12.25	4500	/	900	386	996
385/65R22.5	Double Star	DSR118	20	160	/	K	11.75	4500	/	900	389	1072
	Double Star	DSR566	20	160	/	K	11.75	4500	/	900	389	1072
	Double Star	DSR588	20	160	/	K	11.75	4500	/	900	389	1072
	Double Star	DSR868	20	160	/	K(L)	11.75	4500	/	900	389	1072
	TRIANGLE	TR692	20	160/158	/	J/L	11.75	4500	/	900	389	1072
	TRIANGLE	TR697	20	160/158	/	J/L	11.75	4500	/	900	389	1072
425/65R22.5	Double Star	DSR118	20	165	/	K	13	5150	/	825	430	1124
	Double Star	DSR165	20	164	/	K	13	5150	/	825	430	1124
	Double Star	DSR588	20	165	/	K	13	5150	/	825	430	1124
445/65R22.5	Double Star	DSR118	20	169	/	K	14	5800	/	900	454	1150
	Double Star	DSR165	20	169	/	K	14	5800	/	900	454	1150
	Double Star	DSR588	20	169	/	K	14	5800	/	900	454	1150
750R16	Double Star	DSR008	14	122	118	K	6	1500	1320	770	215	805
	Double Star	DSR188	14	122	118	K	6	1500	1320	770	215	805
8.5R17.5	Double Star	DSR116	12	121	120	L	6	1450	1400	625	215	802
	TRIANGLE	TR656	12	121	120	M	6	1450	1400	625	215	802
	Double Star	DSR266	12	121	120	L	6	1450	1400	625	215	802



NOT AVAILABLE FOR EUROPEAN DISTRIBUTION - PAS DISPONIBLE EN EUROPE

Size	Brand	Patern	Ply rating	Load index		Speed range	Standard Rim	Load capacity		Inflation Pressure (kPa)	Section width (mm)	Overall diameter (mm)
				single	double			single	double			
825R16	Double Star	DSR008A	16	128	124	K	6.50H	1800	1600	770	235	855
	Double Star	DSR158	16	126	122	K	6.50H	1800	1600	670	232	858
	Double Star	DSR188	16	126	122	K	6.50H	1800	1600	670	232	858
8R19.5	TRIANGLE	TR656	12	124	122	K	6	1600	1500	760	203	859
8R22.5	TRIANGLE	TR660	14	130	128	M	6	1900	1800	830	203	935
9.5R17.5	Double Star	DSR116	16	129	127	L	6.75	1850	1750	750	240	842
	Double Star	DSR266	16	129	127	L	6.75	1850	1750	750	240	842
	TRIANGLE	TR656	14	129	127	L	6.75	1850	1750	750	240	842
900R20	Double Star	DSR158	16	144	142	K	7	2800	2650	900	259	1018
	Double Star	HR166	16	144	142	K	7	2800	2650	900	259	1019
	Double Star	HR168	16	144	142	K	7	2800	2650	900	259	1018
	Double Star	HR169	16	144	142	K	7	2800	2650	900	259	1018
9R22.5	Double Star	DSR266	14	136	134	M	6.75	2240	2140	830	229	974
	TRIANGLE	TR665	14	136	134	L	6.75	2240	2120	830	229	974



Bel 25
10.00R20



Bel110
12.00R20



Bel114
10.00R20



Bel115
11.00R20



Bel116
12.00R20



Bel124
11.00R20



Bel247-1,D-3B
11.00R20



Bel310
10.00R20
11.00R20



BI368M
12.00R20



I-111AM
11.00R20



I-A185
10.00R20



U-4.ID-304M
12.00R20



HR166
900R20



HR168
1000R20
900R20



HR169
1000R20
1100R20
11R22.5
900R20



HR268
11R22.5



HR366
12R22.5



HR569

315/80R22.5



DSRAAA

10.00R20



DSR008

7.50R16



DSR008A

825R16



DSR08

12R22.5
295/80R22.5
315/80R22.5



DSR08A

12R22.5 | 295/80R22.5
215/75R17.5 | 315/70R22.5
225/70R19.5 | 315/80R22.5



DSR116

8.50R17.5 | 245/70R19.5
9.5R17.5 | 265/70R19.5
11R22.5 | 275/70R22.5
11R24.5 | 295/60R22.5
215/75R17.5 | 295/75R22.5
225/75R17.5 | 315/60R22.5
235/75R17.5 | 315/80R22.5



DSR118

385/55R22.5
385/65R22.5
425/65R22.5
445/65R22.5



DSR128

385/55R22.5



DSR158

9.00R20 | 11.00R20
8.25R16 | 12.00R20
10.00R20 | 13R22.5



DSR165

215/75R17.5 | 315/70R22.5
235/75R17.5 | 425/65R22.5
315/60R22.5 | 445/65R22.5



DSR168

11.00R20 | 12.00R24
11R22.5 | 13R22.5
12.00R20 | 315/80R22.5
12R22.5



DSR188

7.50R16 | 13R22.5
8.25R16 | 315/80R22.5
12.00R24



DSR258

11R22.5
295/75R22.5



DSR266

8.5R17.5 | 245/70R19.5
9R22.5 | 265/70R19.5
9.5R17.5 | 275/80R22.5
10R22.5 | 285/75R24.5
11R22.5 | 295/75R22.5
12R22.5 | 295/80R22.5
11R24.5 | 315/80R22.5
225/75R17.5 | 315/70R22.5
235/75R17.5 | 275/70R22.5



DSR355

11R22.5
11R24.5
255/70R22.5
285/75R24.5
295/75R22.5



DSR566

285/75R24.5 | 11R22.5
295/75R22.5 | 11R24.5
295/80R22.5 | 385/65R22.5



DSR588

385/65R22.5
425/65R22.5
445/65R22.5



DSR668

11.00R20
12R22.5
315/80R22.5



DSR669

255/70R22.5 | 11R22.5
285/75R24.5 | 11R24.5
295/75R22.5 | 13R22.5
315/80R22.5



DSR728

11R22.5
11R24.5



DSR768

295/75R22.5
11R22.5
11R24.5



DSR865

11R22.5



DSR868

295/80R22.5
315/70R22.5
315/80R22.5
385/65R22.5

LOAD AND SPEED INDEX

LOAD INDEX

Index	kg	Index	kg	Index	kg	Index	kg	Index	kg	Index	kg
0	45	34	118	68	315	102	850	136	2240	170	6000
1	46,2	35	121	69	325	103	875	137	2300	171	6150
2	47,5	36	125	70	335	104	900	138	2360	172	6300
3	48,7	37	128	71	345	105	925	139	2430	173	6500
4	50	38	132	72	355	106	950	140	2500	174	6700
5	51,5	39	136	73	365	107	975	141	2575	175	6900
6	53	40	140	74	375	108	1000	142	2650	176	7100
7	54,5	41	145	75	387	109	1030	143	2725	177	7300
8	56	42	150	76	400	110	1060	144	2800	178	7500
9	58	43	155	77	412	111	1090	145	2900	179	7750
10	60	44	160	78	425	112	1120	146	3000	180	8000
11	61,5	45	165	79	437	113	1150	147	3075	181	8250
12	63	46	170	80	450	114	1180	148	3150	182	8500
13	65	47	175	81	462	115	1215	149	3250	183	8750
14	67	48	180	82	475	116	1250	150	3350	184	9000
15	69	49	185	83	487	117	1285	151	3450	185	9250
16	71	50	190	84	500	118	1320	152	3550	186	9500
17	73	51	195	85	515	119	1360	153	3650	187	9750
18	75	52	200	86	530	120	1400	154	3750	188	10000
19	77,5	53	206	87	545	121	1450	155	3875	189	10300
20	80	54	212	88	560	122	1500	156	4000	190	10600
21	82,5	55	218	89	580	123	1550	157	4125	191	10900
22	85	56	224	90	600	124	1600	158	4250	192	11200
23	87,5	57	230	91	615	125	1650	159	4375	193	11500
24	90	58	236	92	630	126	1700	160	4500	194	11800
25	92,5	59	243	93	650	127	1750	161	4625	195	12150
26	95	60	250	94	670	128	1800	162	4750	196	12500
27	97	61	257	95	690	129	1850	163	4875	197	12850
28	100	62	265	96	710	130	1900	164	5000	198	13200
29	103	63	272	97	730	131	1950	165	5150	199	13600
30	106	64	280	98	750	132	2000	166	5300	200	14000
31	109	65	290	99	775	133	2060	167	5450	201	14500
32	112	66	300	100	800	134	2120	168	5600	202	15000
33	115	67	307	101	825	135	2180	169	5800	203	15500

SPEED INDEX

Index	A1	A2	A3	A4	A5	A6	A8	B	C	D	E	F	G	J
Km/h	5	10	15	20	25	30	40	50	60	65	70	80	90	100
Index	K	L	M	N	P	Q	R	S	T	U	H	V	W	Z
Km/h	110	120	130	140	150	160	170	180	190	200	210	240	270	+270

BEDELCO

TYRES

Rue de l'Environnement 22
B-4100 Seraing - BELGIUM
Phone : +32 4 330 18 60
Fax : +32 4 330 18 66
Email : info@bedelco.com
Web : www.bedelco.com

BEDELCO

Al Djazair car
PNEUS

Lotissement ATTAR, Groupe C N° 20
Dar El Beida - ALGER
Phone : +213 21 75 22 31
Fax : +213 21 75 22 31
Email : info@bedelco.dz
Web : www.bedelco.dz

BEDELCO EAST EUROPE

Pneu Maxx
IMPORTATOR SI DISTRIBUTOR ANVELOPE

Aleea Maria-Laura, Com Dragomiresti Vale
077040 - ROMÂNIA
Phone : +40 21 202 60 60
Fax : +40 21 202 60 10
E-mail : office.tyres@pneumaxx.ro
Web : www.pneumaxx.ro

